

## **ROPE OPENER** LINE

Lines for opening and cutting the tubular fabrics after bleaching, washing, dyeing or reprocessing operations.





## **ROPE OPENER LINE**


Machine for opening the woven and tubular knit fabrics, designed for work in automatic way at high speed operation.

overall dimensions L x H x W	depending on the configuration
material	stainless steel
turntable diameter	1700mm (on request 2000)
rollers width	EVO 2: from 2000 mm to 3000 mm EVO 3: from 3200mm to 4000mm
fabric width	EVO 2: from 1800mm to 2800mm EVO 3: from 3000mm to 3800mm
max mechanical speed	120 m/min
max compressed air	6 bar
standard voltage	3x400VAC-50Hz or others on request
installed power	10 kW rope opener
	20 kW with Padder
	28/47 kW with Vacuum System
motorization	AC controlled by inverter
padder rollers diameter	290mm
maximum load foulard squeezing	503 kg/cm
ambient temperature	from 0° to + 55 ° (optional A/C for electrical cabinet)
noise	<75db(A)
operator pannel	color touch screen
control	PLC
teleservice	optional
industry 4.0	optional




## **ROPE OPENER** LINE


Lines for opening and cutting the tubular fabrics after bleaching, washing, dyeing or reprocessing operations.

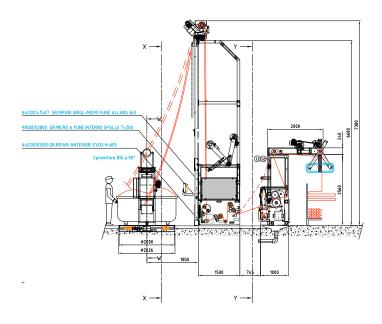

Bianco® Rope Opener

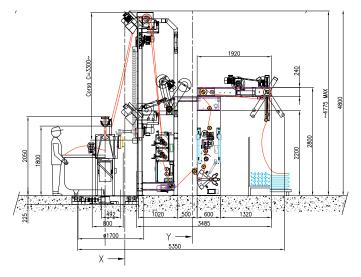

Bianco® Rope Opener with Padder



Bianco® Rope Opener with Vacuum System