




KB10 FABRIC GUIDE

Devices for distension and centering the fabric.

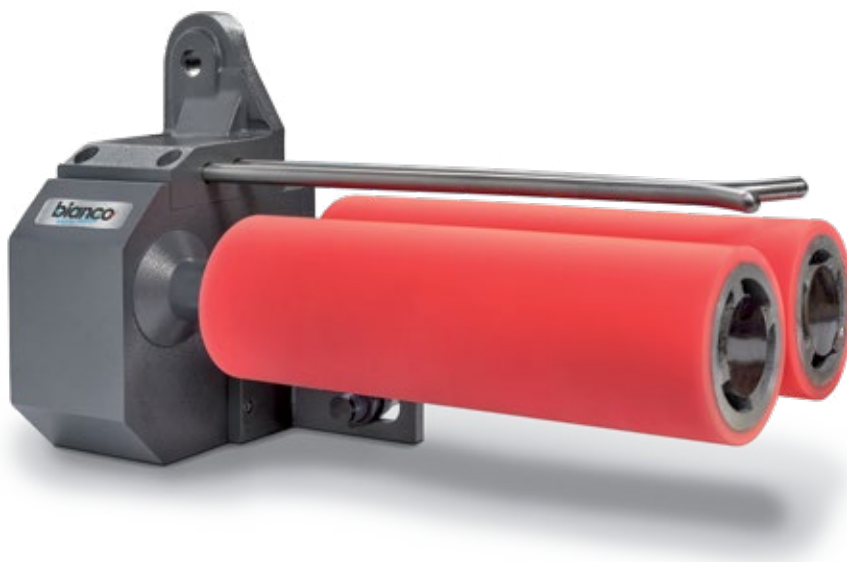

KB10 FABRIC GUIDE

System for distension the tape by means of two groups placed on the two sides of the fabric.

overall dimensions L x H x W	470 x 230 x 250 mm
material	Painted steel
color on painted steel	RAL 7021
rollers width	200 mm
fabric width	with rolls lenght 200 mm: up 650 to 3500 mm
mechanical speed max	150 m/min
standard auxiliary circuit	24VDC
installed power	100 W
ambient temperature	from 0° to + 50° C
command pressure	from 0,5 to 2 bar max
producer setting	1 bar
fabric position control	alignment by means of ON/OFF photocell
electrical cabinet	independent or included on the installation

